

JW

Most versatile recycle duct type

Light module is dockable. Plastic duct base is non-toxic material and can be separated with 2 conductor rails easily. It is recyclable and creates non-toxic gas when burnt.



JW2030F



Light module case color : Milky white / LED color : full color (Red,Green,Blue,White,Light blue,Purple , Yellow) / Confirm button color : Milky white



Product Intro Video

Configuration



Wide range of products



Without digit type JW2000F



3 digits type JW2030F



3-digits type with "S" & "-" function buttons JW2030PF



5 digits type JW2050F




5 digits type "S" & "-" function buttons JW2050PF




Multi work type JW2055F



Flat cap drip-proof type JW2000FZ

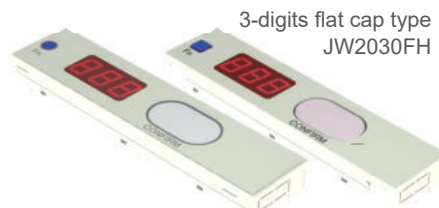

3-digits flat cap drip-proof type JW2030FH

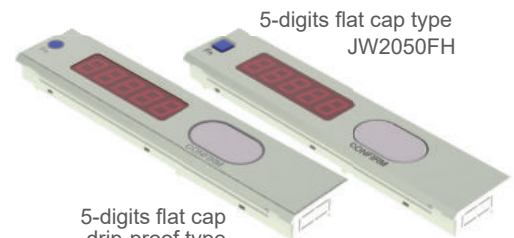

5-digits flat cap drip-proof type JW2050FH

※ Various types can be selected depending on the application.

The RoHS directive is the directive which bans certain hazardous substances from electrical and electronic devices such as computers, communication devices and home electronics used in the European Union. This is intended to minimize risks of hazardous human health and burdens on the environment in the product life cycle from production to disposal.



AIOI • SYSTEMS CO.,LTD.

E-MAIL : info@hello-aioi.com URL : https://www.hello-aioi.com/en

[Headquarters] WiRA Omori Bldg.9F, 1-6-8 Omori Kita, Ota-ku, Tokyo, 143-0016, JAPAN
TEL: +81 3 (3764) 0228 FAX: +81 3 (3764) 7520

[Osaka Branch] Nissay Kyobashi Bldg. #301, 4-6-22 Higashinodamachi, Miyakojima-ku, Osaka 534-0024, Japan
TEL: +81 6 (6242) 8062 FAX: +81 6 (6242) 6570


[Nagoya Branch] ID-AREA. #301, 1-2-4 Kanayama, Naka-ku, Nagoya 460-0022, Japan
TEL: +81 52 (339) 1766 FAX: +81 52 (339) 1767

NW

Wireless Light Module

It can be mounted freely on pallets, baskets, totes etc. Since electronic paper was adopted as the display part, the battery life of the conventional battery remarkably extends.

Configuration

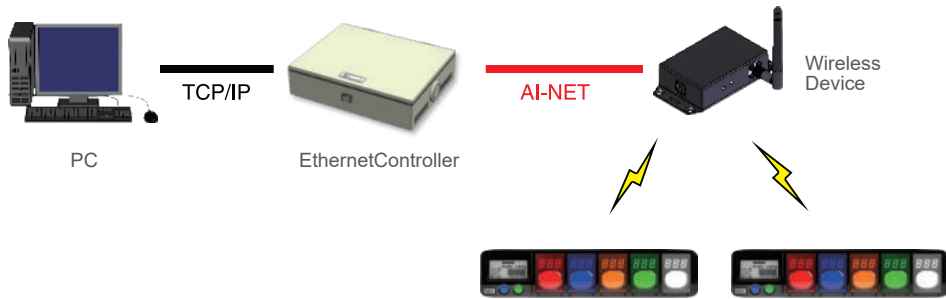

Specification

- Communication method – Simplex method / ■ Radio Frequency – FSK / ■ Frequency Band – 2402MHz ~ 2481 MHz / ■ Transmission distance – 30 ~ 40m / ■ Transmission speed - 38400 bps / ■ Usage environment– Temperature 0°C ~ 35°C, Humidity – 20~ 80% (no condensation) / ■ Battery – 3 AA nickel-metal hydride batteries / ■ Battery charger – special charger NW2960, Full charge 8 hours

Wide range of products



NW2974N
Shock Absorbing Cover/
Multi work (5 different color buttons)
/Dot Module Display



NW2974NS(Chargeable during operation)
Shock Absorbing Cover/
Multi work (5 different color buttons)
/Dot Module Display



NW2978
Multi work (5 different color buttons)
type 3-digit light Module



NW2978-010(For Refrigeration Environment)
Refrigeration Environment
Multiple Operator Instruction
7SEG Independent Display



NW2979
Vertical 4-digit 5-color
multi-work

The RoHS directive is the directive which bans certain hazardous substances from electrical and electronic devices such as computers, communication devices and home electronics used in the European Union. This is intended to minimize risks of hazarding human health and burdens on the environment in the product life cycle from production to disposal.



AIOI • SYSTEMS CO.,LTD.

E-MAIL : info@hello-aioi.com URL : <https://www.hello-aioi.com/en>

[Headquarters] WiRA Omori Bldg.9F, 1-6-8 Omori Kita, Ota-ku, Tokyo, 143-0016, JAPAN
TEL: +81 3 (3764) 0228 FAX: +81 3 (3764) 7520

[Osaka Branch] Nissay Kyobashi Bldg. #301, 4-6-22 Higashinodamachi, Miyakojima-ku, Osaka 534-0024, Japan
TEL: +81 6 (6242) 8062 FAX: +81 6 (6242) 6570

[Nagoya Branch] ID-AREA. #301, 1-2-4 Kanayama, Naka-ku, Nagoya 460-0022, Japan
TEL: +81 52 (339) 1766 FAX: +81 52 (339) 1767

MWU

Light module with push-tabs to help easy mounting and demounting

The new light module (MWU) is provided with push-tabs for easy mounting or demounting, convenient for reposition or relocation of Light Modules selectable from among 3 types of bases for attaching according to type of structure: Aluminum duct base, Pipe frame attaching base, and Flat shelf attaching base



Aluminum duct mounting



Flat self mounting



Pipe mounting



MWU2040PF

Contiguration



Common Specifications

- Display Case color-Black/■LED lamp color-Full color [Red Green Blue Light blue White Purple Yellow] /
- Numerical designation LED color - Red(Character height 10.0mm)/■Dimensions(Body dimensions excluding projections ductbased)

Wide range of products



3-digits 3-colors multi display MWU2090-333-02

2-2 digits double light MWU2040PRG-22


6 digits type MWU2060PF



MWU2030FNFSH
※The yellow gate part is optional



With limit switch type
MWU2040PFS



Without digit with limit switch type
MWU2000LFS



4-digits sensor type
MWU2040FE



2-digits vertical type
MWU2020PFV



Without digit
MWU2000LF



Without digit sensor type
MWU2000FE



Dot-module type
MWU2401F



MWU2060-222



Dot-module type
MWU2402

※Various types can be selected depending on the application.

The RoHS directive is the directive which bans certain hazardous substances from electrical and electronic deiveces such as computers,communication devices and home electronics used in the European Union.This is intended to minimize risks of hazarding human health and burdens on the environmentin the product life cycle from production to disposal.



AIOI • SYSTEMS CO.,LTD.

E-MAIL : info@hello-aioi.com URL : https://www.hello-aioi.com/en

[Headquarters] WiRA Omori Bldg.9F, 1-6-8 Omori Kita, Ota-ku, Tokyo, 143-0016, JAPAN
TEL: +81 3 (3764) 0228 FAX: +81 3 (3764) 7520

[Osaka Branch] Nissay Kyobashi Bldg. #301, 4-6-22 Higashinodamachi, Miyakojima-ku, Osaka 534-0024, Japan
TEL: +81 6 (6242) 8062 FAX: +81 6 (6242) 6570

[Nagoya Branch] ID-AREA. #301, 1-2-4 Kanayama, Naka-ku, Nagoya 460-0022, Japan
TEL: +81 52 (339) 1766 FAX: +81 52 (339) 1767

MWU Pokayoke Gate Light Module


Indicate a picking instruction by shutter and lamp

Notify picking instructions with shutter and lamp. Since the indicated number of products are put into the open area, sorting errors can be reduced to "zero" as much as possible.


Both sorting and picking are available. Equipped with the latest functions that can adjust the address setting, opening / closing angle, speed, and shut-off time by NFC communication. (Smartphone / HHT compatible)



Product introduction video

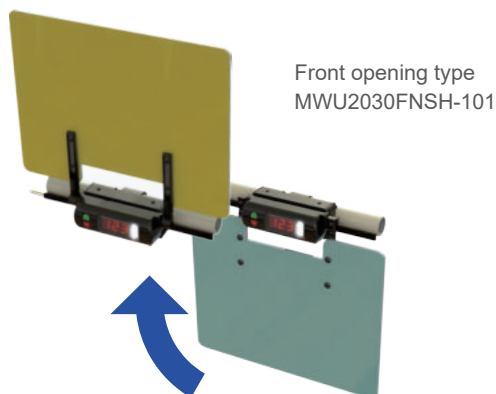


Front opening type
MWU2030FNSH-101

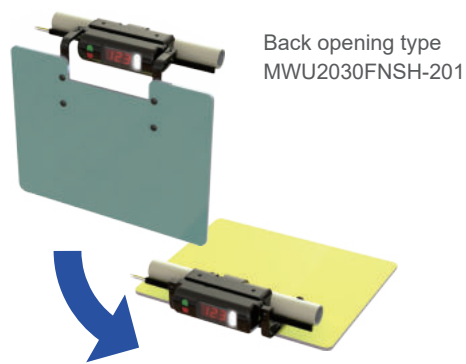

Back opening type
MWU2030FNSH-201

Configuration

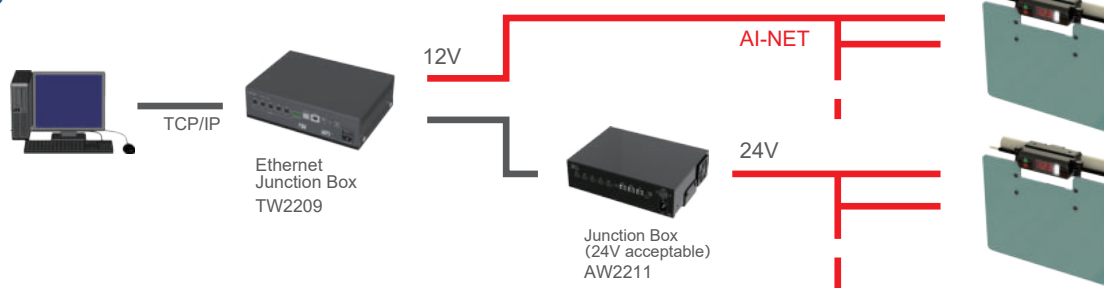

Installation Method


Can choose to install various bases such as ducts, flat pipes. It can be installed according to the site environment.



AW Cube

External devices can be controlled centralized.

Cube can input and output power supply and digital signal to external devices. It is used for realizing synchronization with picking work after being connected with conveyors and various devices.



AW2902

- AI-NET is a non-polarized 2-wire communication system developed by our company. ● Please note that appearance and specifications are subject to change for improvement.
- The color of the product may differ slightly from the actual product depending on the condition of the screen.



AIOI • SYSTEMS CO.,LTD.

E-MAIL : info@hello-aioi.com URL : <https://www.hello-aioi.com/en>

[Headquarters] WiRA Omori Bldg.9F, 1-6-8 Omori Kita, Ota-ku, Tokyo, 143-0016, JAPAN
TEL: +81 3 (3764) 0228 FAX: +81 3 (3764) 7520

[Osaka Branch] Nissay Kyobashi Bldg. #301, 4-6-22 Higashinodamachi, Miyakojima-ku, Osaka 534-0024, Japan
TEL: +81 6 (6242) 8062 FAX: +81 6 (6242) 6570

[Nagoya Branch] ID-AREA. #301, 1-2-4 Kanayama, Naka-ku, Nagoya 460-0022, Japan
TEL: +81 52 (339) 1766 FAX: +81 52 (339) 1767

MW

Light module with push-tabs to help easy mounting and demounting

The new light module (MW) is provided with push-tabs for easy mounting or demounting, convenient for reposition or relocation of Light Modules



Configuration



Common Specifications

- Display Case color-Milky white/■LED lamp color-Full color [Red Green Blue Light blue White Purple Yellow] /
- Numerical designation LED color - Red(Character height 14.2mm)/■Dimensions(Body dimensions excluding projections ductbased)

MW2020F Size (mm) : 110×37×20.5

MW2030F Size (mm) : 125×37×20.5

MW2401-eP Size(mm) : 110×37×20.5

※MW2401-eP operates under eP controller.

SW

Compact, suitable for handling of small items

Digital display light modules can be easily and quickly mounted or demounted on or from the special ducts. Special ducts can be attached to your existing pike racks or flat shelves.

Compact light modules are suitable for a system for picking small parts.



- RoHSCompliant to RoHS Direction※-



Configuration



Common specifications

- Module case color: Milky white ■Dome cap:Clear/Red ■LED light - Full color(red, green, blue, white, aqua, purple, and yellow)/Unicolor:red ■Digital display: LED color- red (character high: 10.0mm) ■ Buzzer: not provided
- External dimensions(excluding protruding parts and duct base)
- SW1001F/R - W45×H27.5×D26.5mm
- SW1021F/R - W84×H27.5×D26.5mm
- SW1031F/R - W95×H27.5×D26.5mm

Duct bases are mounted onto shelves or pipe racks with screws (Duct base for pipe can be attached to pipe with adhesive tape)

The RoHS directive is the directive which bans certain hazardous substances from electrical and electronic devices such as computers, communication devices and home electronics used in the European Union. This is intended to minimize risks of hazarding human health and burdens on the environment in the product life cycle from production to disposal.



AIOI • SYSTEMS CO.,LTD.

E-MAIL : info@hello-aioi.com URL : https://www.hello-aioi.com/en

[Headquarters] WiRA Omori Bldg.9F, 1-6-8 Omori Kita, Ota-ku, Tokyo, 143-0016, JAPAN
TEL: +81 3 (3764) 0228 FAX: +81 3 (3764) 7520

[Osaka Branch] Nissay Kyobashi Bldg. #301, 4-6-22 Higashinodamachi, Miyakojima-ku, Osaka 534-0024, Japan
TEL: +81 6 (6242) 8062 FAX: +81 6 (6242) 6570

[Nagoya Branch] ID-AREA. #301, 1-2-4 Kanayama, Naka-ku, Nagoya 460-0022, Japan
TEL: +81 52 (339) 1766 FAX: +81 52 (339) 1767